




ADJUSTABLE DOWNLIGHT SMALL

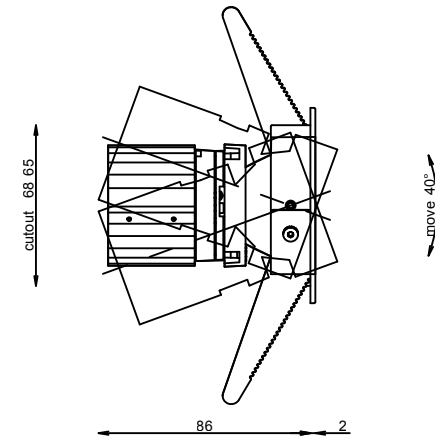

Installation: recessed

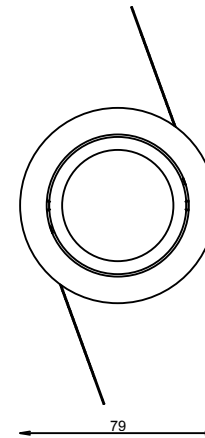

LIGHT COLOR

CIDCOLOR/KELVIN/NM CRI

8		2700K	≥80
2		3000K	≥80
9		3500K	≥80
7		4000K	≥80
VIBR		3000K VIBRANCE	≥95

MODULE

MID POWER CURRENT LM OUTPUT

C-2000 Module	0	9,3W	350mA	1105lm
C-2000 Module Vibrance	1	9,3W	350mA	1105lm

LIGHT DISTRIBUTION

LID DESCRIPTION

3	Narrow 20°
2	Medium 40°
4	Glare Free Diffuse

SURFACE COLOR

SID COLOR CAPTION

NE		anodized
33		matte chrome
05		anodized black
03		white satin coated

other finishes on request

PRODUCT CODE / NOMENCLATURE

MID LID CID SID

150	XX	XX	0	XX	-	XX
-----	-----------	-----------	---	-----------	---	-----------